

WINDOW SCHEDULE

WINDOW MARK	WINDOW TYPE	SIZE		FRAME TYPE	MATERIAL	GLAZING				DETAILS				RATING
		WIDTH	HEIGHT			SINGLE	DOUBLE	TEMP	LOW E	HEAD	JAMB	SILL	MULL	
A	1	19'-0"	10'-6"		ALUM		X	X	X	17/CD1	17/CD1	21,23/CD1		
B	2	+/5'-0	+/5'-0		WOOD	X				7/CD1	7/CD1	2/CD1	1/CD1	
C	3	12'-0"	8'-0"		ALUM		X	X	X	17/CD1	17/CD1	21,23/CD1		
D	4	8'-3"	8'-0"		ALUM		X	X	X	17/CD1	17/CD1	21,23/CD1		
E	5	6'-6"	8'-0"		ALUM		X	X	X	17,CD1	17/CD1	21,23/CD1		
F	6	9'-8"	8'-0"		ALUM		X	X	X	17/CD1	17/CD1	21,23/CD1		
G	7	6'-0"	5'-0"		VINYL		X		X	10/CD1	10/CD1	22/CD1		
H	14	2'-0"	2'-0"		VINYL		X		X	10/CD1	10/CD1	3/CD1		
I	8	2'-0"	2'-0"		VINYL		X		X	10/CD1	10/CD1	22/CD1		
J	9	2'-0"	8'-0"		WOOD	X		X		18/CD1	18/CD1	24/CD1	12/CD1	
K	9	3'-0"	8'-0"		WOOD	X		X		18/CD1	18/CD1	24/CD1	12/CD1	
L	10	3'-0"	4'-6"		VINYL		X	X	X	10/CD1	10/CD1	22/CD1		
M	11	9'-0"	5'-0"		VINYL		X	X	X	10/CD1	10/CD1	22/CD1		
N	12	3'-0"	5'-0"		VINYL		X	X	X	10/CD1	10/CD1	22/CD1		
O	7	6'-0"	5'-0"		VINYL		X		X	10/CD1	10/CD1	16/CD1		
P	7	3'-0"	8'-0"		ALUM		X		X	10/CD1	10/CD1	16/CD1		

WINDOW NOT

INSTALL DEVICES WHICH ALLOW WINDOWS TO BE LOCKED FROM THE INTERIOR


ALL WINDOWS SHALL BE DUAL GLAZED WITH WEATHER-STRIPPED OR LOW INfiltration FRAMES MEETING ANGLIA INfiltration STANDARDS.

1. GLAZING IN SWINGING DOORS EXCEPT JALOUSIES
2. GLAZING IN FIXED AND SLIDING PANELS OF SLIDING DOOR ASSEMBLIES AND PANELS IN SLIDING AND BI-FOLD CLOSET DOOR ASSEMBLIES
3. GLAZING IN STORM DOORS
4. GLAZING IN UNFRAMED SWINGING DOORS
5. GLAZING IN DOORS AND ENCLOSURES FOR HOT TUBS, WHIRLPOOLS, SAUNAS, STEAM ROOMS, BATHTUBS AND SHOWERS. GLAZING IN ANY PORTION OF A BUILDING WALL ENCLOSING THESE COMPARTMENTS WHERE THE BOTTOM EXPOSED EDGE OF GLAZING IS LESS THAN 60" ABOVE A STANDING SURFACE.
6. GLAZING IN INDIVIDUAL FIXED OR OPERABLE PANEL ADJACENT TO A DOOR WHERE THE NEAREST EXPOSED EDGE OF THE GLAZING IS WITHIN A 24" ARC OF EITHER SIDE OF THE DOOR FRAME OR IN A 12" DIAGONAL POSITION.

EXCEPTION:
AN INTERVENING WALL BETWEEN DOOR & GLAZI

WINDOW TYPES

WINDOW / ENERGY INFORMATION
(SEE T-24 FOR INFORMATION)
GLAZING U-FACTOR =
SOLAR HEAT GAIN COEFFICIENT

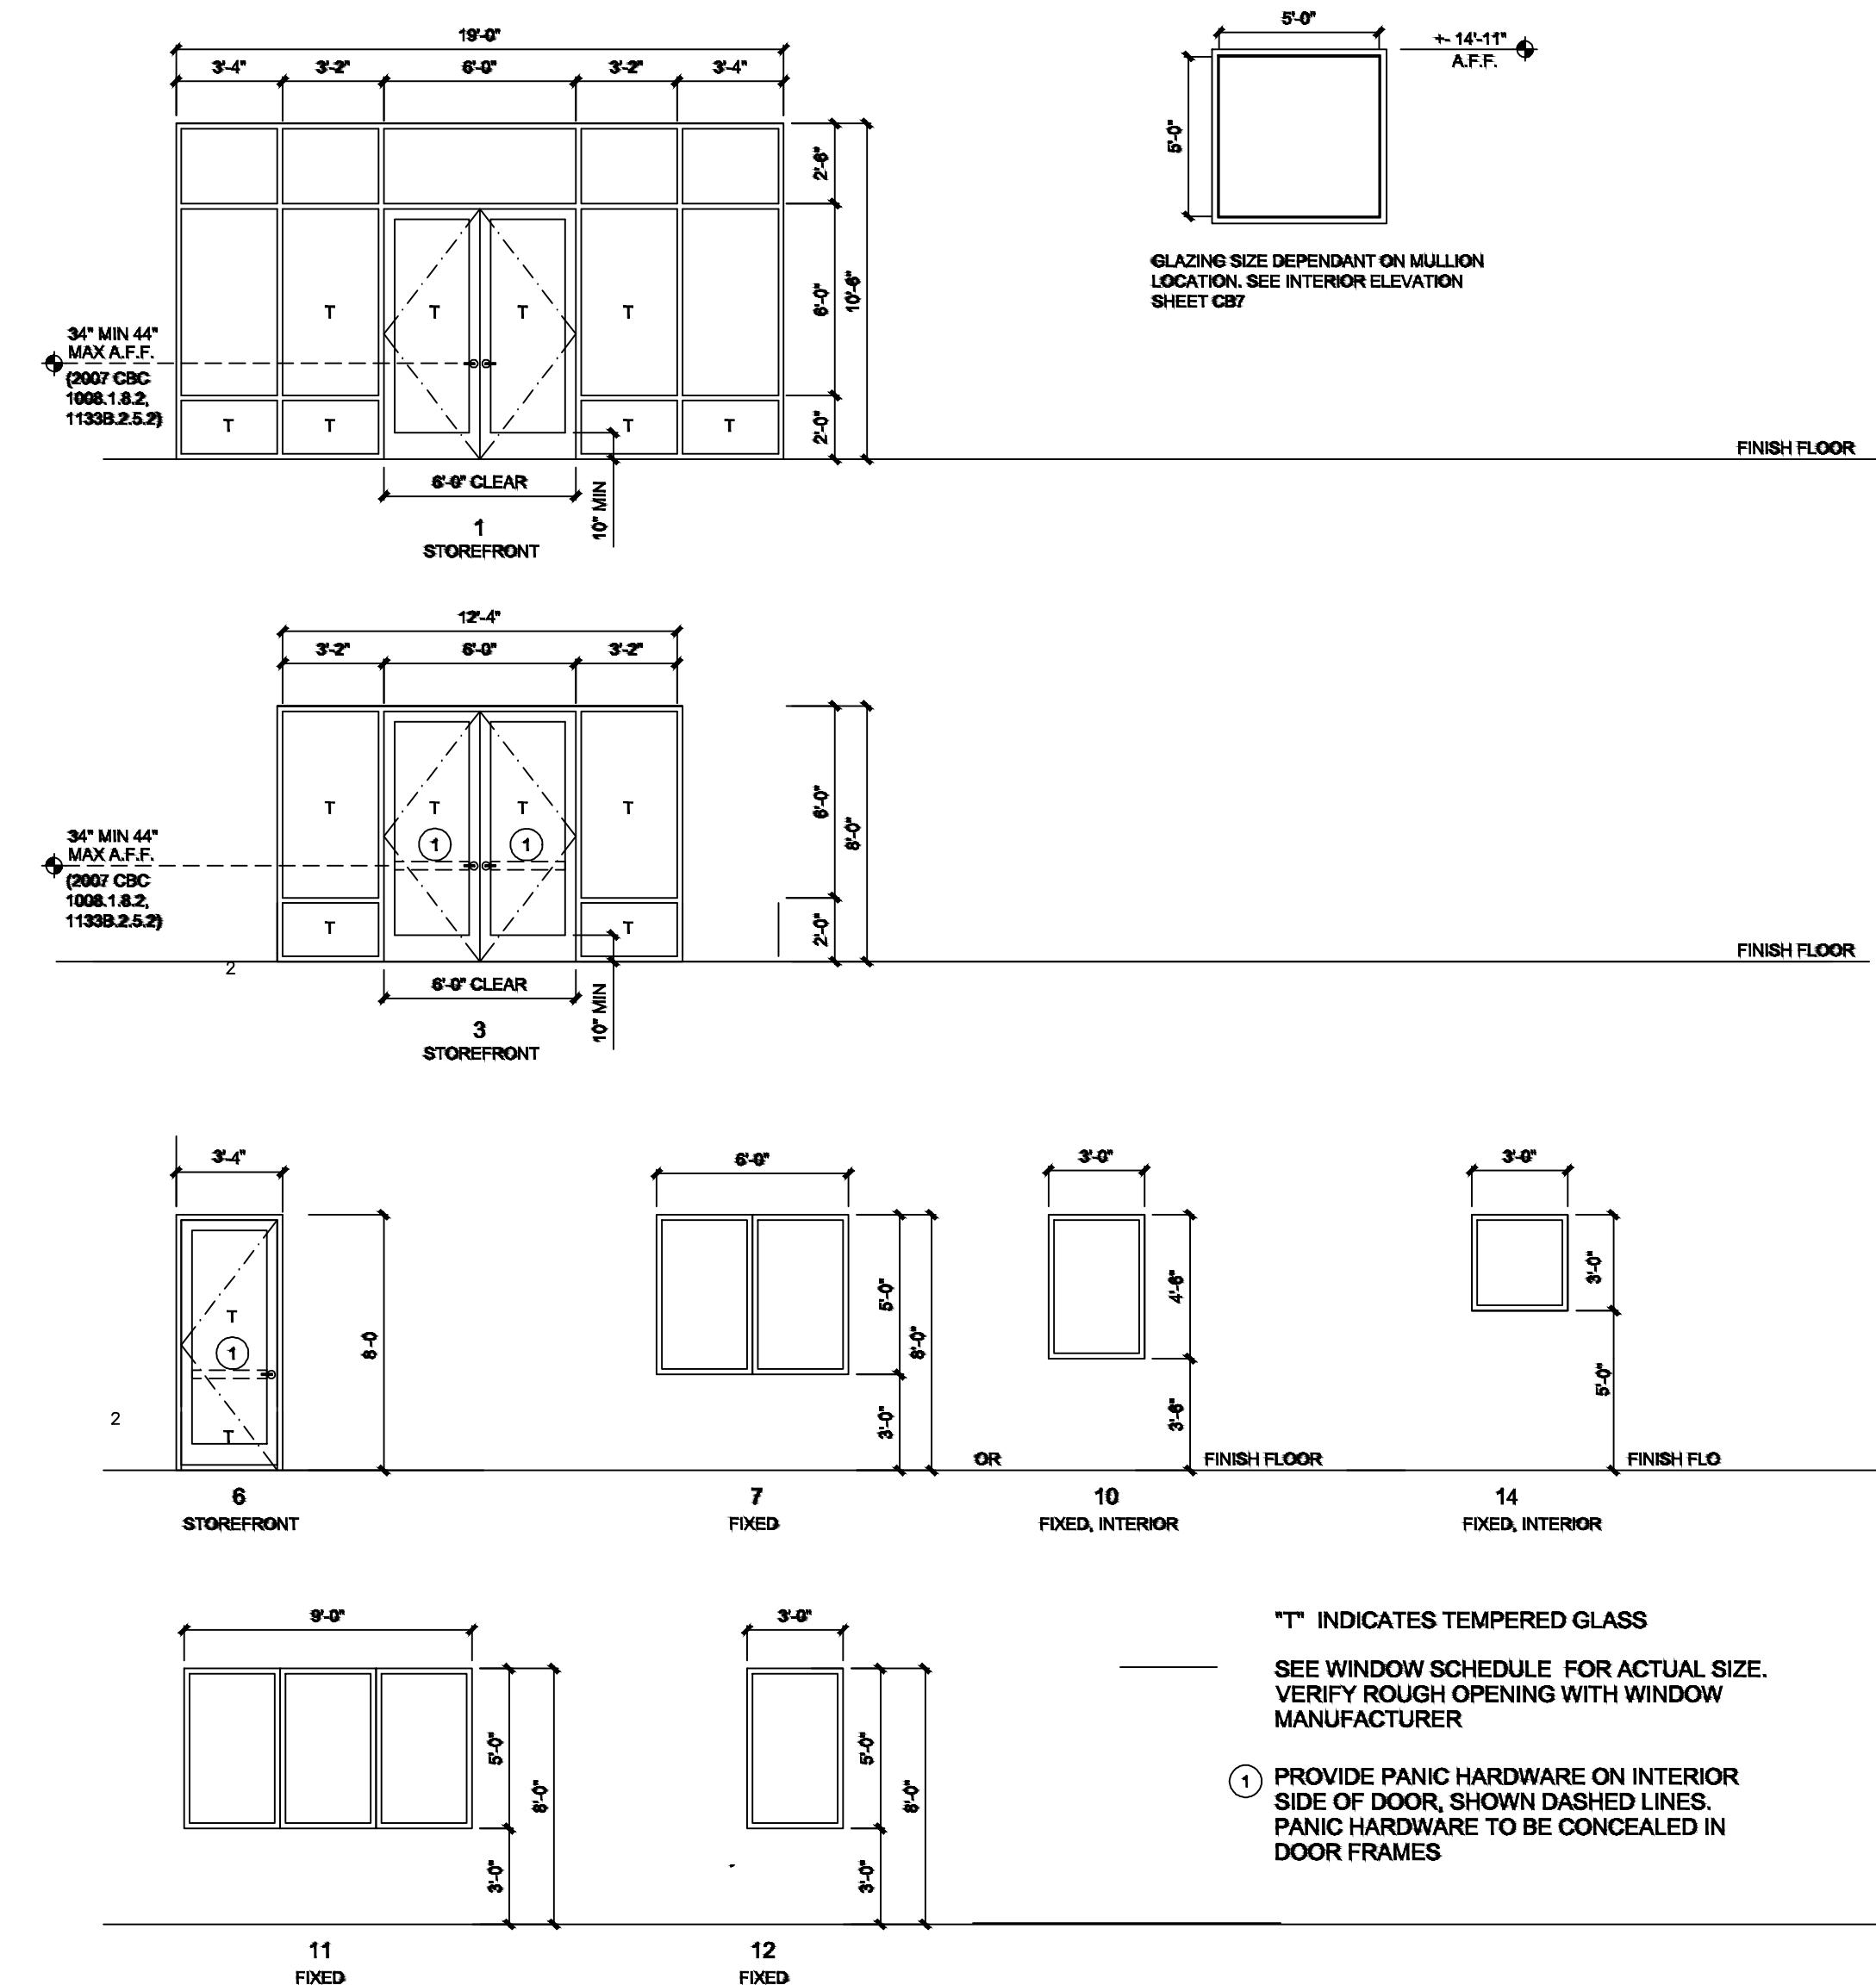

FINISH SCHEDULE

FINISH LEGENDS

<u>FLOORS</u>		<u>BASE</u>	<u>WALLS</u>	<u>CEILINGS</u>	<u>PAINT</u>
F1	CARPET	B1 4" MDF BASE	W1 GYPSUM BOARD, LEVEL & SMOOTH FINISH	C1 GYPSUM BOARD SPRAYED ON FINISH	P1 PAINT FLAT LATEX
2	F2 SHEET VINYL	B2 NOT USED	W2 COLORED FRP PANELS TO 4' ABOVE F.F.	C2 SUSPENDED TILE CEILING	P2 PAINT SEMI GLOSS
	F3 CONCRETE SMOOTH FINISH SEALED		W3 GYPSUM BOARD TAPED & TOPPED JOINTS	C3 GYPSUM BOARD TAPED & TOPPED JOINTS	
	F4 CARPET TILE	B3 GLUEDOWN BASE			

GENERAL FINISH NOTES

1. PAINT HVAC REGISTERS TO MATCH THE COLOR OF THE WALL ON WHICH THEY OCCUR
2. PAINT SECURITY CAMERA HOUSING TO MATCH COLOR OF SURFACE ON WHICH CAMERA OCCURS
3. SQUARE ALL OUTSIDE CORNERS AT WALL, CEILINGS, HEADERS, ARCHES, SOFFITS, NICHES, DOORS, WINDOWS, ETC.

DOOR NOTES


1. ALL DOORS PROVIDED FOR EGRESS PURPOSES SHALL COMPLY WITH THE PROVISIONS IN (2010CBC)
2. ALL DOORS WILL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT (2010 CBC 008.1.8)
3. UNLATCHING OF ANY COMMON AREA DOOR SHALL NOT REQUIRE MORE THAN 1 OPERATION. (2010 CBC 1008.1.8.5)
4. ALL EXTERIOR DOORS SHALL BE FULLY WEATHERSTRIPPED.
5. PROVIDE INSULATED DOORS BETWEEN ALL CONDITIONED AND NON CONDITIONED SPACES
6. PROVIDE SELF CLOSING DOORS WITH SMOKE AND DRAFT CONTROL ASSEMBLIES FOR ALL DOORS OPENING INTO THE CORRIDORS.
7. SEE COMMUNITY CENTER KEYNOTES ON SHEET CB2 FOR NOTES REGARDING SIGNAGE
8. PROVIDE KNOX BOX AT ELECTRICAL / FIRE ROOM 1 DOOR #14 PER THE CITY OF VALLEJO FIRE DEPARTMENT STANDARDS

HANDICAPPED ACCESSIBILITY NOTES


- HC1 HANDICAPPED ACCESSIBILITY REQUIREMENTS
(2010 CBC CHAPTER 11B)**
- HC2 ALL HAND ACTIVATED DOOR OPENING HARDWARE REQUIRED FOR EXITING SHALL BE LEVER TYPE. (2010 CBC 1133B.2.5.2)**
- HC3 LEVER TYPE HARDWARE SHALL RETURN TO WITHIN 1/2" OF THE DOOR FACE**
- HC4 DOORS WITH CLOSERS: THE SWEEP PERIOD OF THE CLOSER SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 70 DEGREES, THE DOOR WILL TAKE @ LEAST 3 SECONDS TO MOVE TO A POINT 3" FROM THE LATCH, MEASURED TO THE LEADING EDGE OF THE DOOR (2010 CBC 1133B.2.5.1)**
- HC5 MAXIMUM EFFORT TO OPERATE DOORS SHALL NOT EXCEED 5 POUNDS FOR EXTERIOR DOORS AND 5 POUNDS FOR INTERIOR DOORS. MAXIMUM EFFORT OF 15 POUNDS FOR FIRE DOORS IF ALLOWED BY BUILDING OFFICIAL (2010 CBC 1133B.2.5.1, 1133B.2.5)**
- HC6 THE BOTTOM 10" OF ALL DOORS AND GATES SHALL HAVE A SMOOTH SURFACE ON THE PUSH SIDE OF THE DOOR TO ALLOW THE DOOR TO BE OPENED WITH A WHEELCHAIR FOOTREST WITHOUT A TRAP OR CONDITION (2010 CBC 1133B.2.6) (MAY REQUIRED LOWER ARMS OF PANIC HARDWARE TO BE CONCEALED)**

4 TYPICAL DOOR ELEVATIONS

SEE SHEET A4.10 FOR DOOR SCHEDULES

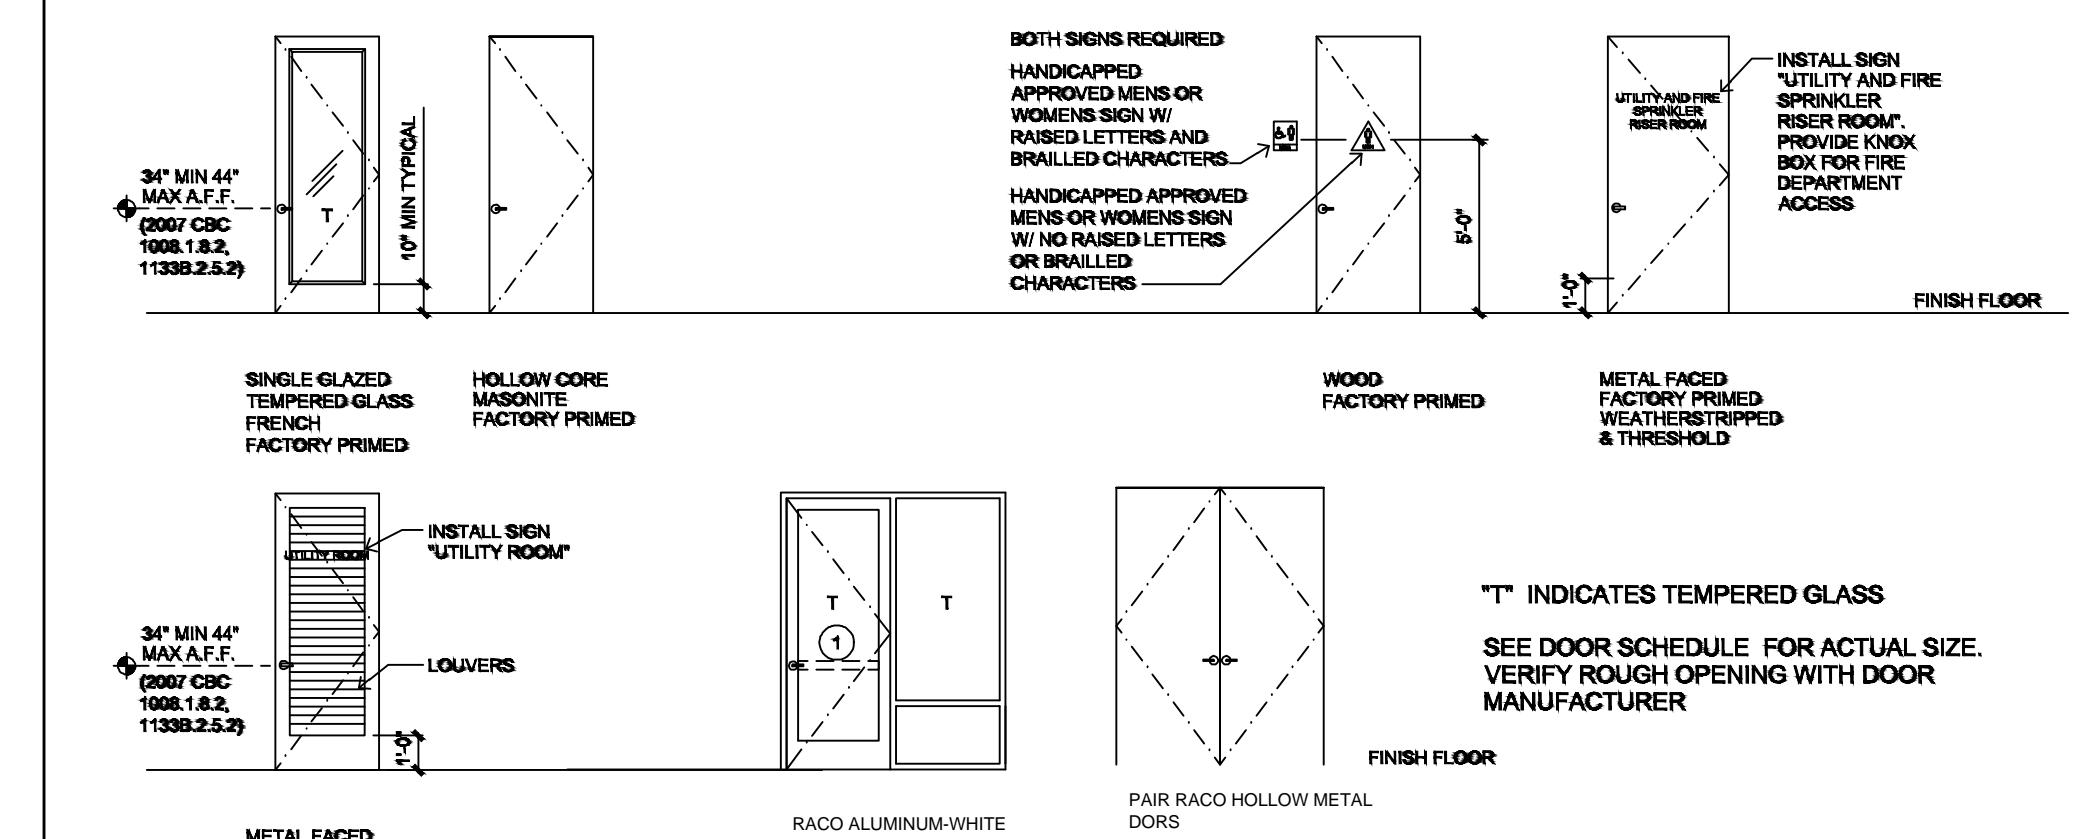

卷之三

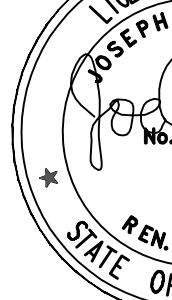REVISIONS	BY
9/26/2011 – PLAN CHECK	G.O.
01/20/2014 – BIDDING	LR
01/27/2014 – BIDDING	JO
03/27/2014 – DOOR SCHEDULE	STAFF
 <p>LICENSED ARCHITECT JOSEPH OAKLEY SR. No. 15457 REN. 9-30-14 STATE OF CALIFORNIA</p>	

CHITEET, CIVIL & STRUCTURAL ENGINEERS
OAKLEY & OAKLEY
100 EDGEWATER DRIVE, STE. 615
KLAND, CA 94621
0.562.6028
X 510.562.6043

PROJECT TITLE:		COMMUNITY CENTER	
DRAFTER:		A R	
DRAWING NUMBER:		77	
DATE:		0 A	
SHEET NUMBER:		51	
SHEET TOTALS:		F A	
<p>DOOR, WINDOW & FINISH SCHEDULE-COMMUNITY ROOMS & OFFICES</p>			

Date:	08/30/2011
Scale:	AS NOTED
Drawn:	STAFF
Checked:	RY
Job No.:	2011-09
Sheet:	A4.1
Of	Sheets

A4.1